





The bright purple nylon insert identifies Tork Lok Nuts and denotes precision manufacture from the finest materials, to assure top product performance. "Look for the Royal Purple Insert!"

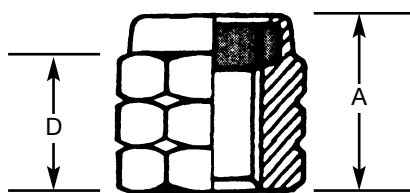

STAKE MARKS AVAILABLE

NOTCHED CORNERS ON HEX INDICATE HEAT TREATED TO RC 26-34

| Size | Continental-Aero Part Number *See Note | Thread †See Note | Standard Container Quantity | Weight Lbs./C (Steel) | A Height **See Note | B Across Flats | C (Ref) Across Corners | D (Ref) Wrench Pad |
|-------|---|---------------------|-----------------------------|-----------------------|------------------------|----------------|------------------------|--------------------|
| 3/8 | 5XN1268-064 | 3/8-24 | 1,800 | 2.6 | .641 | .566-.551 | .624 | .523 |
| 7/16 | 5XN1268-070 | 7/16-20 | 1,200 | 3.6 | .765 | .628-.612 | .694 | .657 |
| 1/2 | 5XN1268-080 | 1/2-20 | 800 | 5.9 | .812 | .754-.736 | .829 | .683 |
| 9/16 | 5XN1268-098 | 9/16-18 | 500 | 9.6 | .922 | .879-.861 | .969 | .736 |
| 5/8 | 5XN1268-108 | 5/8-18 | 400 | 12.0 | 1.000 | .942-.922 | 1.037 | .901 |
| 3/4 | 5XN1268-126 | 3/4-16 | 250 | 18.0 | 1.250 | 1.067-1.045 | 1.175 | 1.114 |
| 7/8 | 5XN1268-144 | 7/8-14 | 150 | 30.0 | 1.438 | 1.255-1.231 | 1.382 | 1.299 |
| 1 | 5XN1268-164 | 1-14 | 100 | 46.0 | 1.672 | 1.444-1.417 | 1.589 | 1.452 |
| 1 1/8 | 5XN1268-182 | 1 1/8-12 | 90 | 65.0 | 1.843 | 1.632-1.602 | 1.796 | 1.697 |
| 1 1/4 | 5XN1268-202 | 1 1/4-12 | 69 | 88.0 | 2.031 | 1.820-1.788 | 2.002 | 1.841 |
| 1 3/8 | 5XN1268-222 | 1 3/8-12 | 54 | 117.0 | 2.221 | 2.008-1.973 | 2.232 | 1.945 |
| 1 1/2 | 5XN1268-242 | 1 1/2-12 | 45 | 147.0 | 2.380 | 2.197-2.159 | 2.416 | 2.105 |

Locking Insert: Purple nylon (250°F max. performance) white and staked available.

Material: Steel (A1S1-C1137 or equivalent) Heat treated Rockwell C 26-34.

* **Note:** See page 2 for parts nomenclature; substitute digits for material and finish in place of "xx" in part numbers above.

** **Note:** TOLERANCES — 1/8" through 7/8": ±.015; 1" through 1 1/2": ±.031.

† **Note:** Other thread sizes are available from stock or on application.