





The bright purple nylon insert identifies Tork Lok Nuts and denotes precision manufacture from the finest materials, to assure top product performance. "Look for the Royal Purple Insert"

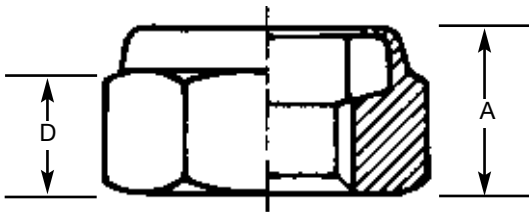

STAKE MARKS AVAILABLE

NMRH (NM107, 408 & 2234) SERIES

Continental-Aero Part Number	Thread	A Height **See Note	B Across Flats	C (Ref) Across Corners	D (Ref) Wrench Pad	Ultimate Tensile Strength Lb. Min.	Approx. Weight Lb./100
2xNM107-62 (steel)	6-32	.143	.252-.240	.275	.081	500	.14
9xNM107-62 (brass)	6-32	.143	.252-.240	.275	.081	350	.14
2xNM408-82 (steel)	8-32	.180	.314-.302	.344	.103	1,200	.26
79NM408-40 (stainless steel)	4-40	.117	.252-.240	.275	.080		.11
79NM408-62 (stainless steel)	6-32	.133	.252-.240	.275	.071		.13
79NM408-82 (stainless steel)	8-32	.180	.314-.302	.344	.103		.26
79NM408-02 (stainless steel)	10-32	.180	.314-.302	.344	.103		.23
79NM408-048 (stainless steel)	¼-28	.239	.377-.365	.413	.190		.40
2xNM2234-02 (steel)	10-32	.180	.314-.302	.344	.103	1,500	.23

- \*Note: Part Numbers:** See inside front cover for parts nomenclature; substitute digits for material and finish in place of "xx" in part numbers above.
- \*\* Note: TOLERANCES:** ±.010 Dec.; ±.2° Ang., unless otherwise specified.
- † Note: Thread Sizes:** Other thread sizes are available from stock or on application.
- Locking Insert:** Purple nylon, (250°F Max. performance) white and staked available.
- Applications:** Listed hexagons are undersize with respect to conventional nut standards. They are offered for possible use for applications where wrench clearances are limited.