





The bright purple nylon insert identifies Tork Lok Nuts and denotes precision manufacture from the finest materials, to assure top product performance. "Look for the Royal Purple Insert"

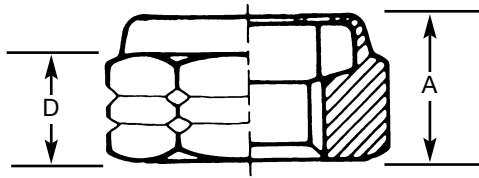

STAKE MARKS AVAILABLE

NOTCHED CORNERS ON HEX INDICATE HEAT TREATED TO RC 26-34

Size	Continental-Aero Part Number *See Note	Thread †See Note	Standard Container Quantity	Weight Lbs./C (Steel)	A Height **See Note	B Across Flats	C (Ref) Across Corners	D (Ref) Wrench Pad
1 1/8	5XNTU1610-182	1 1/8-12	160	43.0	0.969	1.814-1.801	2.038	.627
1 1/4	5XNTU1610-202	1 1/4-12	105	57.0	1.109	2.008-1.973	2.232	.720
1 3/8	5XNTU1610-222	1 3/8-12	75	70.0	1.188	2.197-2.159	2.444	.767
1 1/2	5XNTU1610-242	1 1/2-12	60	95.0	1.313	2.384-2.344	2.622	.810
1 5/8	5XNTU1610-262	1 5/8-12	45	100.0	1.391	2.572-2.530	2.886	.887
1 3/4	5XNTU1610-282	1 3/4-12	36	140.0	1.469	2.762-2.715	3.075	.986
1 7/8	5XNTU1610-302	1 7/8-12	30	159.0	1.520	2.950-2.901	3.242	1.000
2	5XNTU1610-322	2-12	25	210.0	1.672	3.137-3.086	3.497	1.016
2 1/4	5XNTU1610-362	2 1/4-12	16	290.0	1.938	3.514-3.457	3.918	1.179
2 1/2	5XNTU1610-402	2 1/2-12	12	430.0	2.187	4.015-3.875	4.393	1.523
2 3/4	5XNTU1610-444	2 3/4-4	12	375.0	2.187	4.015-3.875	4.393	1.523
	5XNTU1610-448	2 3/4-8						
	5XNTU1610-442	2 3/4-12						
3	5XNTU1610-484	3-4	6	675.0	2.725	4.640-4.500	5.102	2.075
	5XNTU1610-482	3-12						
	5XNTU1610-488	3-8						

Locking Insert: Purple nylon (250°F max. performance) white and staked available.

* **Note:** See page 2 for parts nomenclature; substitute digits for material and finish in place of "xx" in part numbers above.

** **Note:** TOLERANCES — 1" through 1 1/2: ±.031; 1 1/2" and over ±.063.

† **Note:** Other thread sizes are available from stock or on application.

Material—Steel (AISI C1137 or equivalent). Heat-Treated Rockwell C 26-34.

NTU8 (NTU1610) SERIES